



vigipool
by CCEI

OXEO VP

BRING YOUR ORP
REGULATION TO LIGHT



AUTOMATIC REGULATION

Oxexo VP regulate automatically liquid chlorine of the pool water as long as the redox potential is below the set limit value. Oxexo VP automatically adjusts the water's ORP. Choose the set value and Oxexo VP does the rest.



QUICK VISUALIZATION


The dosing pump lights up according to the measurement and alerts. At a glance, you have a clear view of your pool's ORP!!
Time-savings and ease of use guaranteed throughout the season




ENHANCED COMFORT & SAFETY

Oxexo VP integrates a regulation system designed to offer optimal user comfort and secure ORP monitoring. Thanks to real-time tracking and intuitive visual alerts, it ensures reliable, worry-free water-quality management.

GENERAL PRODUCT OVERVIEW

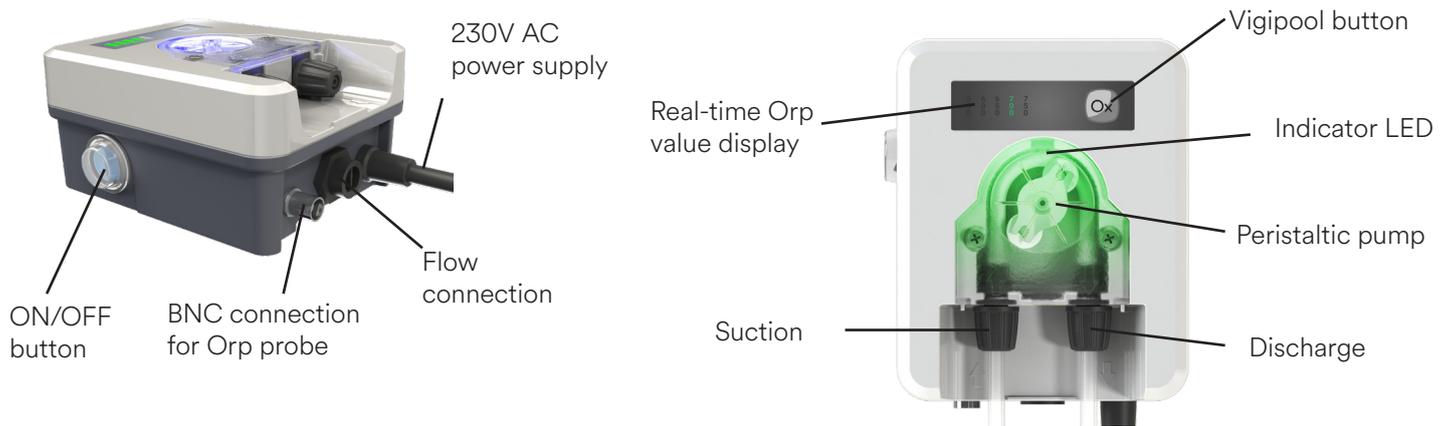

THE MOST EASILY INSTALLED REDOX CONTROLLER ON THE MARKET

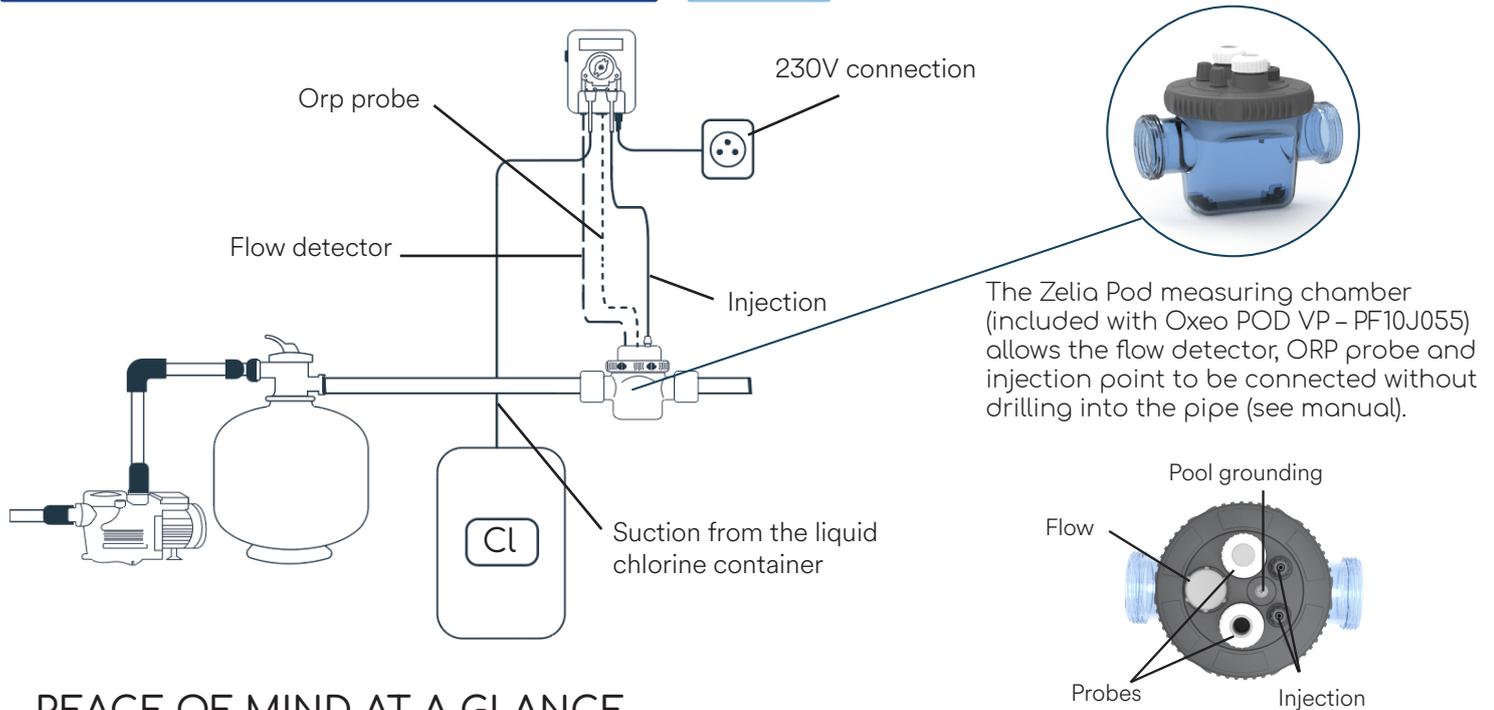

PEACE OF MIND AT A GLANCE



The Oxexo VP dosing pump is equipped with an RGB LED that lights up according to different parameters. This patented process provides a quick overview in the technical room to check whether the pool's ORP level matches the desired value.



OXEO VP IN THE VIGIPOOL APP


Real-time ORP display and setpoint adjustment

Real-time status display and injection adjustment

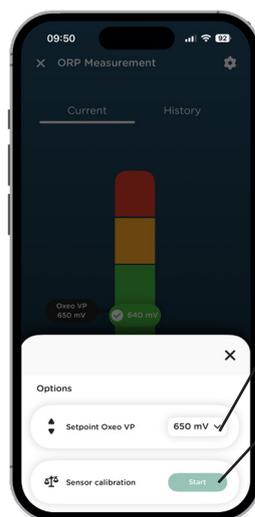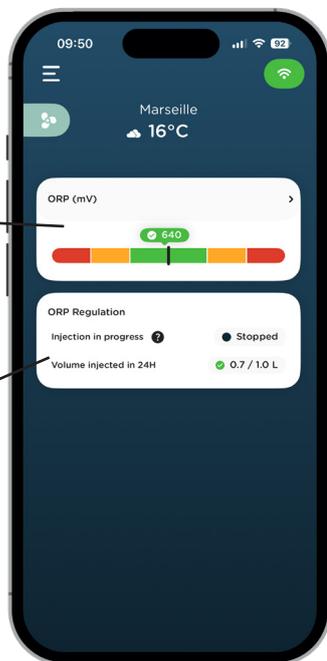

Setpoint selection

ORP probe calibration (recommended at installation and at the start of the season)

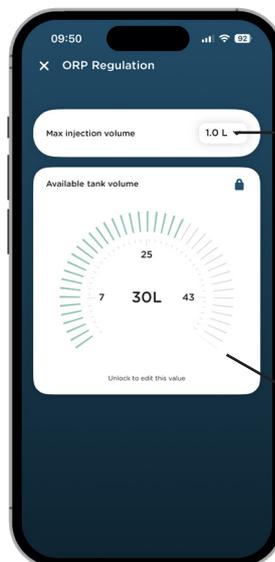

Authorized 24-hour injection volume

Available product volume in the container (alerts when level is low)

VIGIPOOL: MORE THAN AN APP, A COMPLETE ECOSYSTEM

Vigipool is your smartphone application allowing you to always keep your technical room in your pocket. Within the app, centralize your equipment and control your devices connected to the home Wi-Fi network, from anywhere in the world.

Configure your Oxeo VP within a global interface combining filtration control, water treatment and water-temperature management.

AN EVOLVING SOLUTION

For an even more complete installation, add Vigipool-compatible devices to your technical room and watch new features (filtration control, LED lighting control, etc.) appear in the app.



Reference	Model	Supply.	Supplied material		Max injection volume	Max pump rate	Max pool volume	Connexion	Dimensions
PF10J056	Oxeo VP	230V AC	ORP probe, calibration 650mV solution, injection kit,	3 x 50 mm saddle clamps	3 L/day (adjustable)	1.2 L/h	150 m ³	Wi-Fi (local and remote) / Bluetooth®	130 x 115 x 35 mm
PF10J055	Oxeo POD VP			Zelia Pod measuring chamber					



Ne pas jeter sur la voie publique