

Tild +

Highly versatile and fully connected
automation system for pools



Smart Pool Automation Just what you need. Done right.



Universal compatibility

Compatible with any setup, the Tild + adapts to all pool configurations.



Multi-interface control

The Tild + can be operated via the app, or directly using the front panel switches.



All-project ready

Suitable for new builds and retrofits, the Tild+ adapts to any project.




Compact design


Sleek, elegant design with a compact footprint for any installation, even in tight spaces.




Illuminated buttons let you check the status of your Tild+ at a glance.

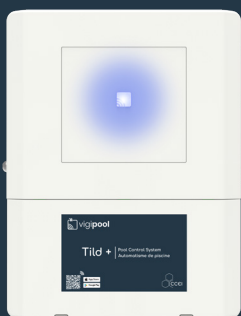


Blue : Bluetooth®
connection OK

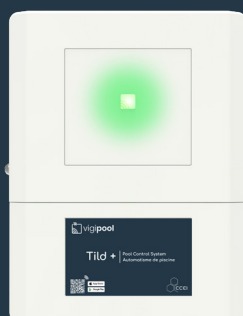

Green : Wi-Fi®
connection OK

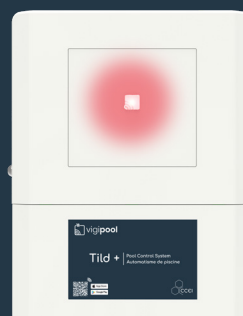

Red :
Hardware alert

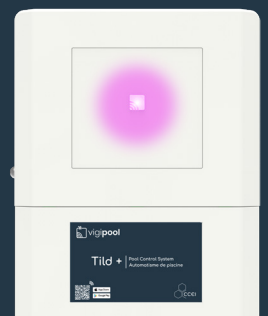


Purple :
Update in progress



PRODUCT OVERVIEW



PRODUCT DIMENSIONS

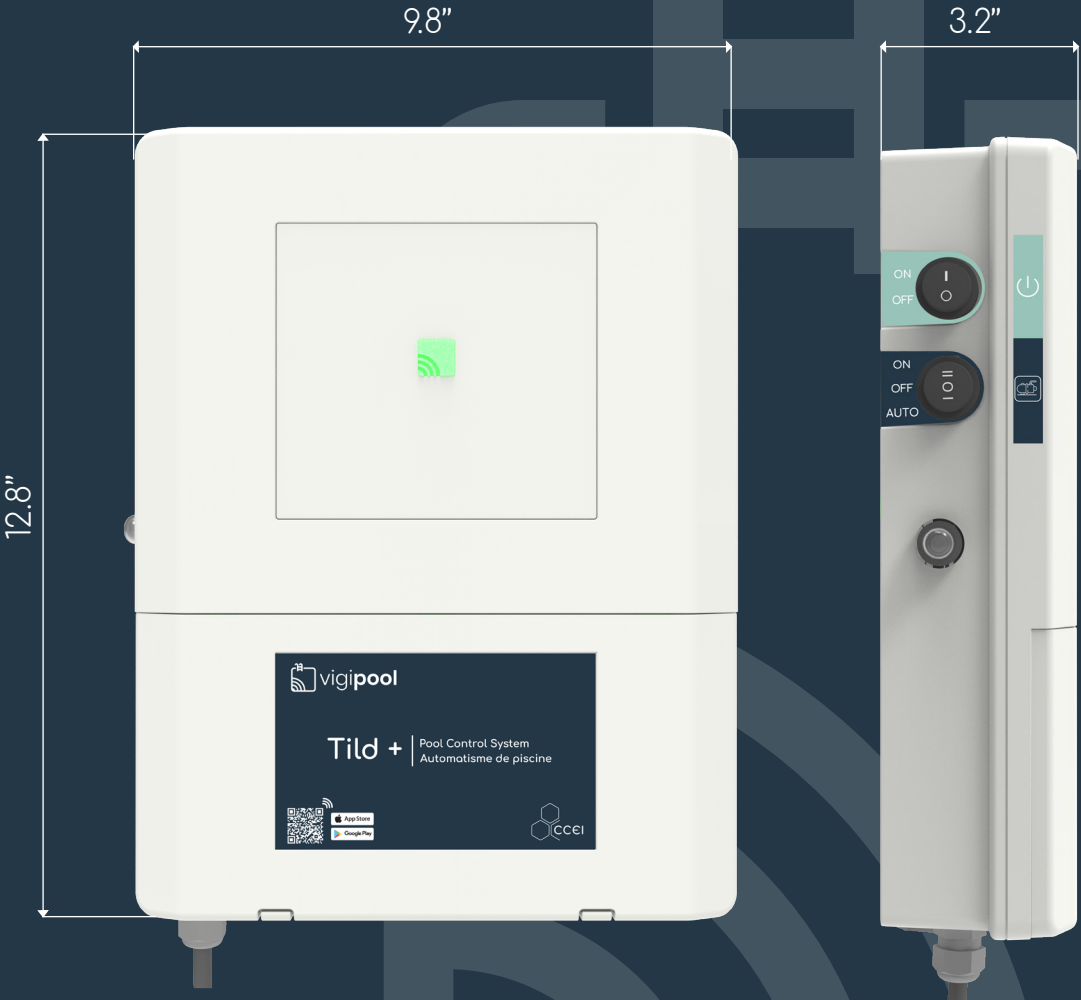

CONNECTIONS

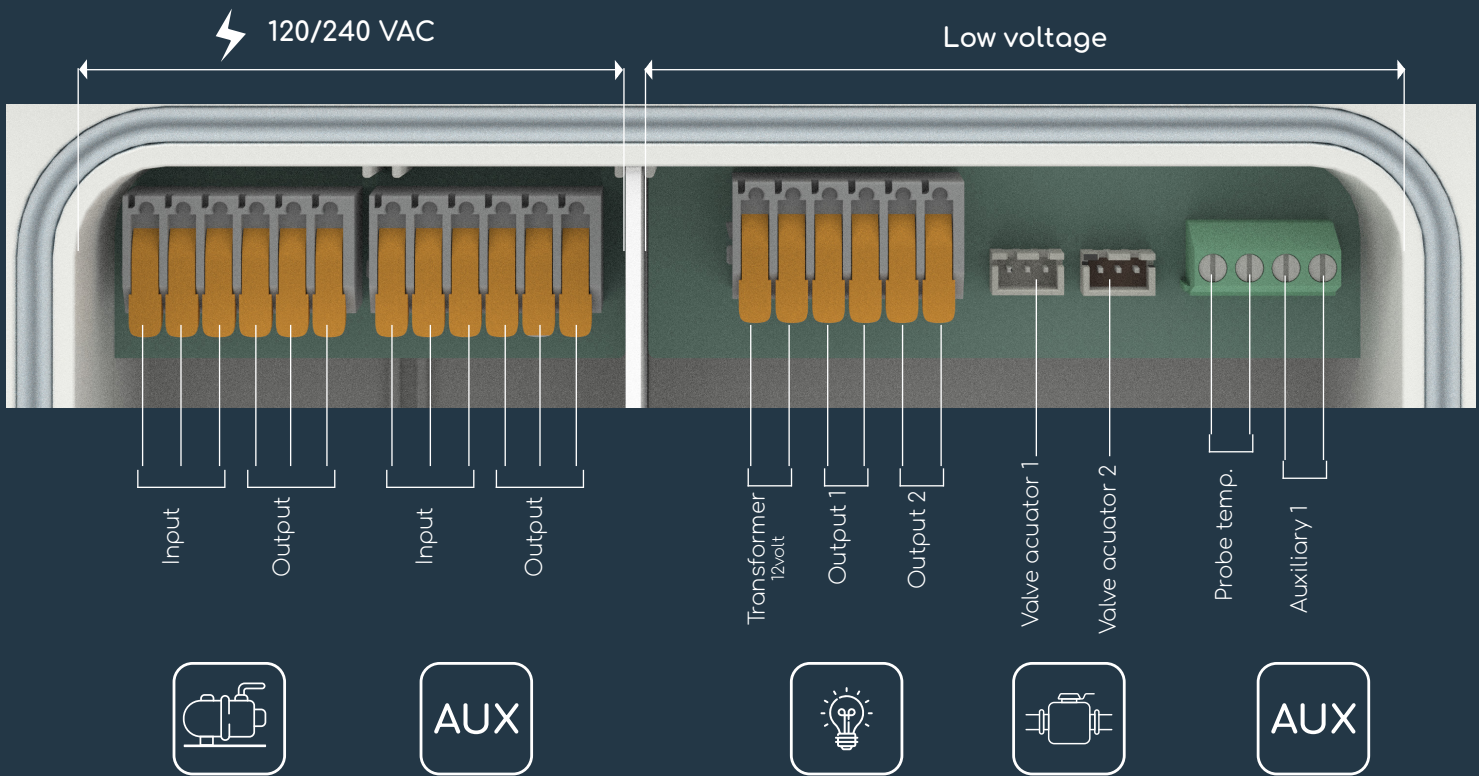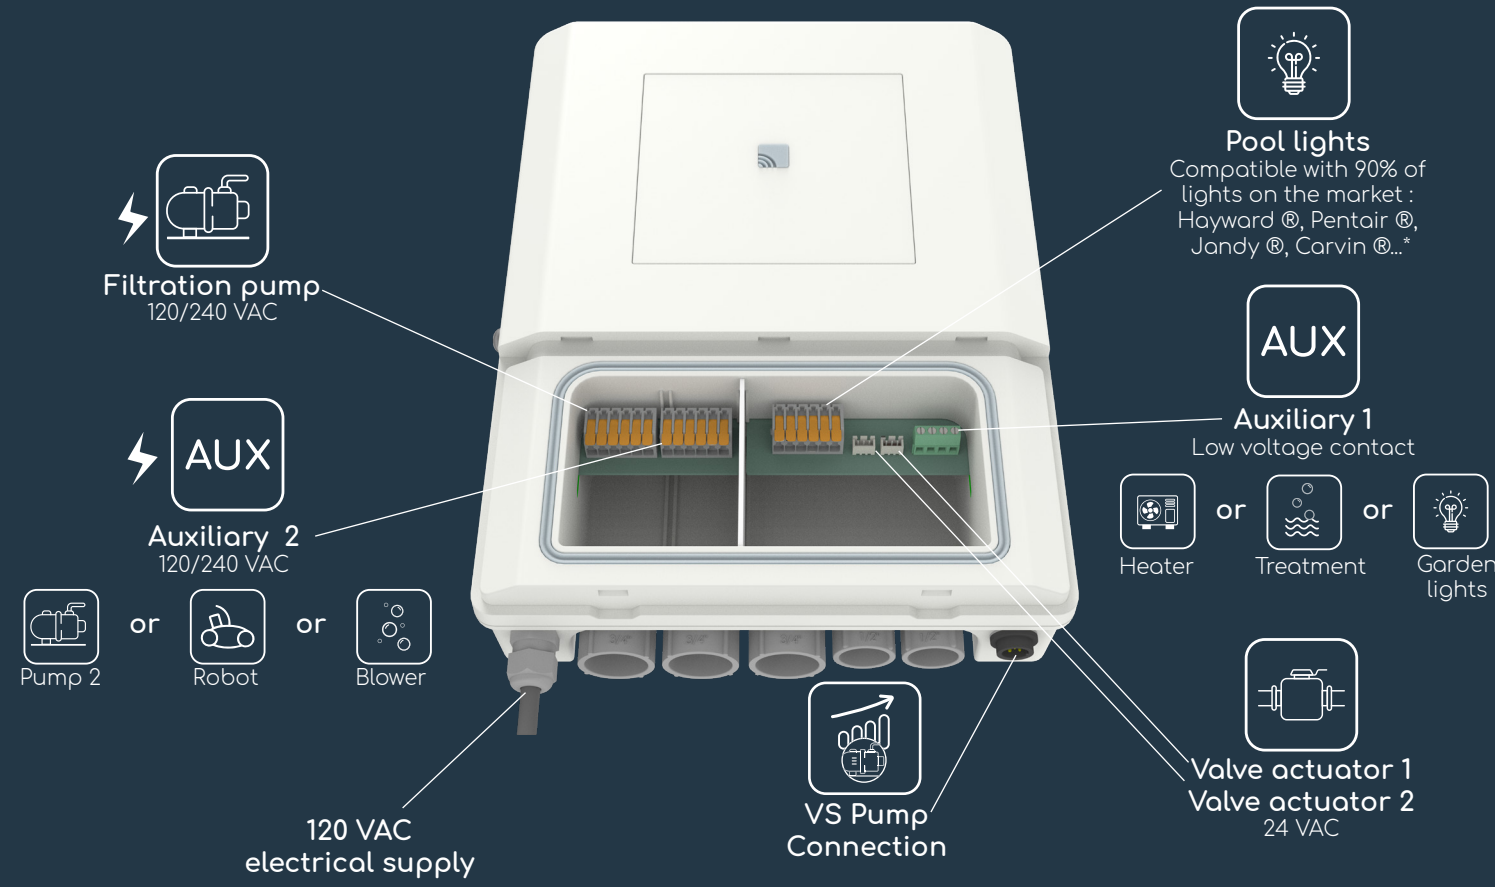

* All trademarks, service marks and trade names are the property of their respective owners.

TILD + IN THE VIGIPOOL APPLICATION



WHAT'S VIGIPOOL

With VigiPool, CCEI offers a range of automated and connected devices that communicate with each other, forming a complete technical pool room that can be controlled from a smartphone using a single app.

CONNECTED PERISTALTIC
pH and ORP CHEMICAL FEEDERS



Phileo VP (pH)

Oxexo VP (Orp)

CONNECTED WATER
LEVEL REGULATOR




VigiLine (Coming soon)



VIGIPOOL SUPERVISION

With Vigipool Supervision, pool professionals can easily monitor and manage their entire pool portfolio in real time.

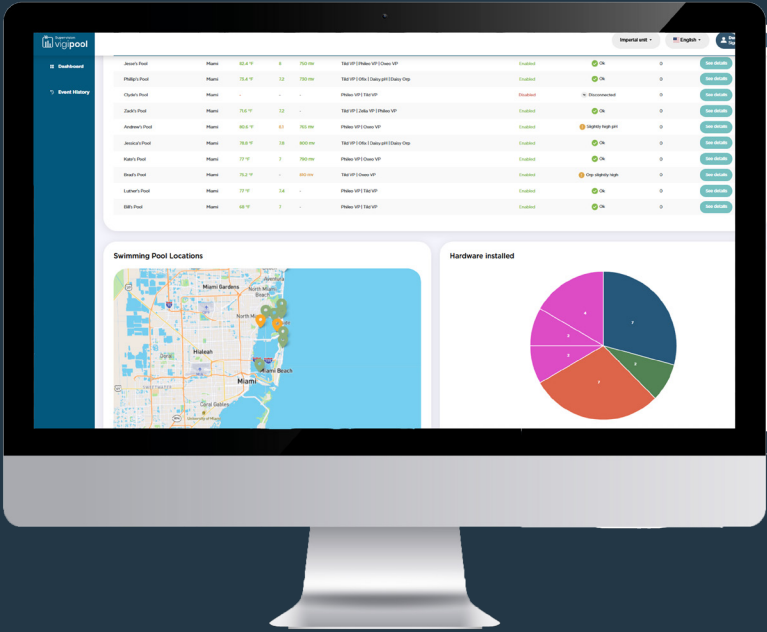

- ✓ Monitor your customers' pools
- ✓ Plan visits with the interactive map
- ✓ Instant portfolio overview
- ✓ Receive and manage alerts
- ✓ Access pool history

<https://na.supervision.vigipool.com>

KEY PRODUCT FEATURES

Model	Supply	Dimensions	Pumps	Valve actuator	lights	Product number (SKU)
Tild +	120 VAC	12.8"x9.8"x3.2"	120 / 240 VAC output	1A per output 1.67A max total	up to 240 VA output	PF10T002

120/240 VAC



Variable speed pump (also work with classic pump)



Auxiliary 2 (pump or jet or robotic cleaner..)



Lights (2 ouput 12 VAC)



Auxiliary 1 (dry contact : heater or salt chlorinator..)



Valve actuator 1 (24 VAC)



Valve actuator 2 (24 VAC)

